



High Performance Bio-based Functional Coatings for Wood and Decorative Applications

# Binders Making bio-based compounds

Developing bio-based binders for wood coatings

Srdjan Gavrilovic,
Tallinn University of Technology, 2024-08-16

Morten Frøseth SINTEF Industry

Bio·based Industries Consortium



This project receives funding from the Bio Based Industries Joint Undertaking under the European Union's Horizon 2020 research and innovation programme under grant agreement No 101022370





## **Wood coatings**



For embellishing and/or protecting wooden surfaces



The current paints and coatings market is mainly based on fossilbased formulations.





In 2019, Europe's bio-based production of paints and coatings was ~164 kt/yr, while fossilbased production was ~718 kt/yr



Due to the percentage contribution, the most promising path towards the development of bio-based coating formulations lies in the replacement of binders, fillers & pigment with plant-based materials







#### **Binders**

- Polymers that form continuous films on substrate surface
- Good adhesion to substrate
- Holds pigment particles distributed throughout coating
- Dispersed in solvent either in molecular form or colloidal dispersion
- Alkyd resins condensation polymerisation of fatty acids and polyols (e.g., glycerol) with polybasic acids
- Acrylic resins polymerisation of acrylic or methacrylic esters
- Latex (PVA) Free radical vinyl polymerisation of monomeric vinyl acetate
- Phenolic resins Reaction of phenol with aldehydes
- Urethane resins (polyurethanes)- polymerisation of isocyanates reacting with molecules containing hydroxyl (alcohol) groups
- **Epoxy**-crosslinking a resin containing short molecules in the presence of a hardener
- Chlorinated rubber polymerisation of degraded natural rubber








### **Bio-based binders**



Bio-based product penetration in the paint industry has so far remained below 5 to 10% mostly due to sub-optimal technical performance and high cost

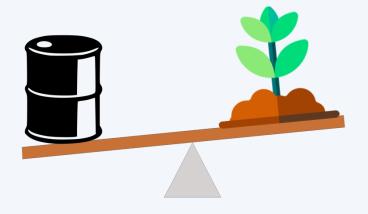



The use of polymers from renewable resources constitutes the base of the needed paradigm shift in the coatings industry as they constitute a non-toxic, non-depletable and biodegradable resource capable of competing with fossil fuel derived petrol-based products

European Union Funding












Bio based Industries Consortium















## Raw materials for bio-based binders

Alginate Xanthan Microbial lipids Free fatty acids
















## Base components explored in developing bio-based binders

Xylan

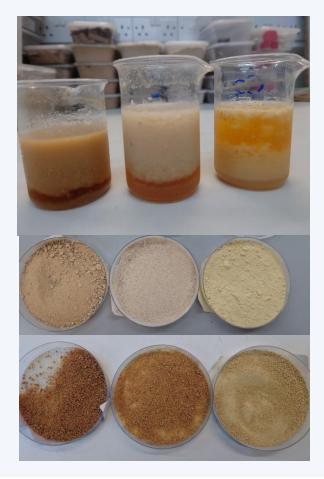

Chitin/Chitosan



Microbial oils/free fatty acids



Alginate













# To succeed in unexpected ways



Adhesives, Binders, Coatings, Copolymers, Elastomers Filers, Flocculants/coagulants, Glues, Lubricants, Packaging materials, Resins, Solvents, Thermoplastics, Thermosets...



#### UV curable and water-based binders



## **UV** curable binder

#### Water-based binder

Target application: Wood coatings

#### **Requirements:**

Liquid pre-polymer

- Liquid oligomer with acrylate moieties
- Acrylate moiety must not be sterically hindered, ideally with spacer between acrylate and polymer backbone for good accessibility

#### Low viscosity solution of resin in reactive diluent

- Solubility in reactive diluents, e.g. ethoxylated TMPTA, TPGDA
- Resin content not lower than 50%, preferred 70%

Target application: Architectural paints

#### **Requirements:**

Water-insoluble polymer

Hydrophobically modified polysaccharide backbone, dispersed in H<sub>2</sub>O

Low-viscous aqueous dispersion with high solids content

Long-term stability against sedimentation and microbial growth

Coalescence into water-resistant closed film

No wash-out, no macroscopic changes upon prolonged contact with water

Film must be flexible

Final film must not be tacky

Appealing optical properties

Final film must be transparent, ideally with high gloss, no yellowing








## Base components explored in developing bio-based binders





Alginate Xanthan Xylan Lipids Fatty acids Alginate is made up of guluronic acid and mannuronic acid.


Xanthan has backbone composed of repeating units of **cellobiose** with side chains of **beta-D**glucose, alpha-D-mannose and alpha-Dglucuronic acid.

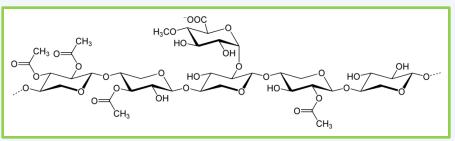



Xylan is a type of hemicellulose, a polysaccharide consisting mainly of xylose residues.

Lipids and fatty acids provide beneficial hydrophobic properties when grafted onto polysaccharides.

Double bond in unsaturated fatty acids acts as an additional functional group.









# **Bio-based binder development strategies**





Alginate, xylan, and chitin explored for chemical and/or enzymatic modification to function as bio-based binders in waterborne coating formulations



Grafting of UV-cross-linkable double-bonds onto short chain alginate, xanthan, oligo saccharides and lipids by mean of (bio)catalysis or microbial engineering will yield **UV-curable binders** for solvent-free UV-curable coating formulations



Additional properties like hardness and scratch resistance as well as fine-tuning of the hydrophilic/hydrophobic balance can be conferred through the introduction of novel nanomaterials



Examples of nanomaterials include microfibrillar cellulose (MFC) and polyhedral oligomeric silsesquioxane (POSS).









## **Polysaccharide modifications**

\*\* Esterification of the OH groups with organic acids, short chain and long chain (fatty acids)



Converting the carboxylic groups into short and long chain esters or amids




¶°° Esterification of OH groups by acrylic acid derivatives






# **Polysaccharide modifications**

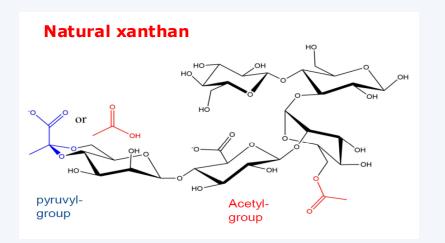



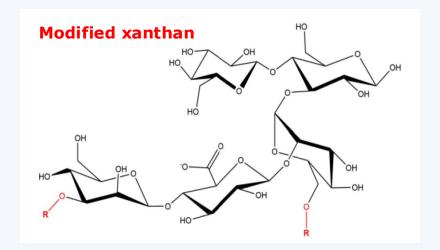



Acetylation and pyruvylation of xanthan



Chemical modification with unsaturated organic acids




Biochemical modifications vivo synthesis of methacrylated xanthan







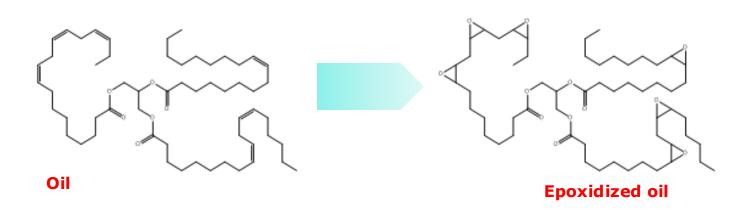





Epoxidation and acrylation of lipids



Reaction with anhydrides and carboxylic acids



Converting the lipid epoxide to alcohol followed by esterification



Reaction with other base polymers









#### **Outcomes of the bio-based binder trials**

#### Progression of binder development







Imperial College London





Binder development Preliminary testing



Film forming ability
Curability
Hydrophobicity
Mechanical strength (Pendulum hardness)
Film uniformity and clarity
Structural analysis (NMR, GPC, etc.)





Formulation and application testing

#### Flow of feedback for binder improvement









## **Way forward**



- 98
- PERFECOAT consortium seeks to established a modular and flexible technology platform for the production of innovative bio-based binders from a range of biopolymers and functionalised materials
- Efficient biotechnological processes based on sustainable feedstock are thereby at the core of our approach and developments
- The coating functionalities obtained through the materials developed in the PERFECOAT project will be wood protection, self-cleaning, waterproofing in addition to inherent properties that will provide the necessary integrity of the coatings for the targeted applications
- The targeted **bio-based binder concentration** in our new formulated coatings will be in the range of **25-50 wt%** and thus alone fulfil the bio-based content required by the call for proposals









High Performance Bio-based Functional Coatings for Wood and Decorative Applications

# Thank you very much for your attention!



